


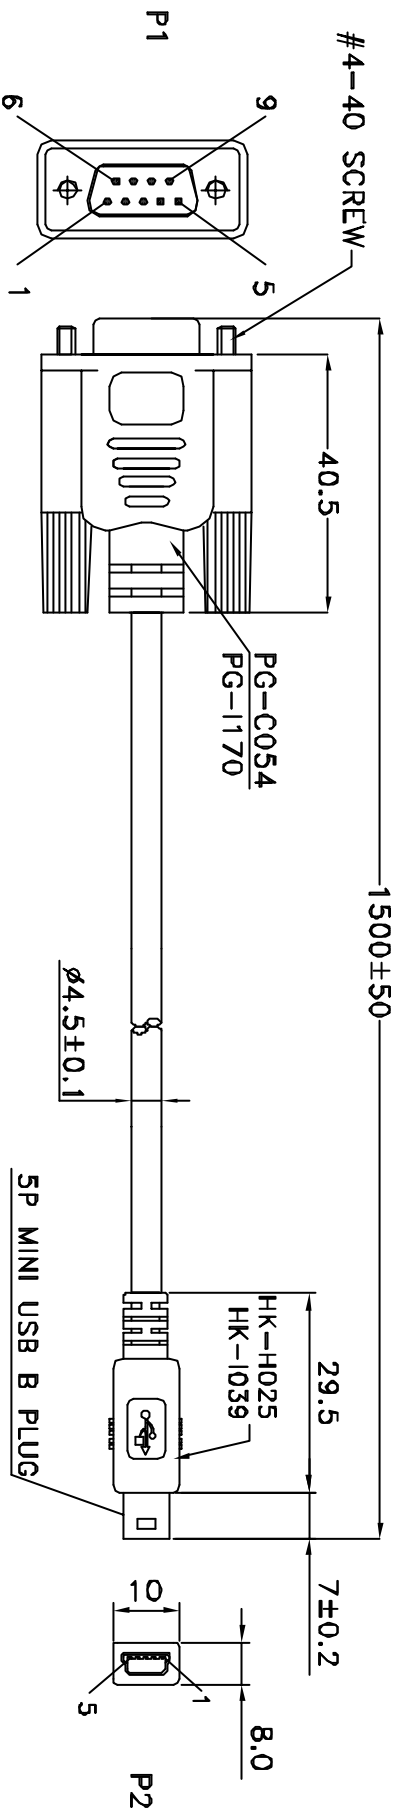

REMARK:

- 1.USB 2.0 CABLE: 28AWG/1P+NYLON,INSULATION:PP,
COLOR:GREEN,WHITE.+26AWG/2C+NYLON,
INSULATION:SR-PVC,COLOR:RED,BLACK.+AL-MYLAR
+DRAIN WIRE:24AWG+BRAID SHIELD+OUTER JACKET:PVC,
COLOR:BLACK,SOFT AND FOG,PRINT WHITE WORDS.
- 2.CONN:P1:DB-09F PIN GOLD PLATED, GWO JINN
P/N: DB-09SS-KS-NG.
P2:MINI USB B PLUG,30μ” GOLD PLATED,
ACON P/N:MNC10-5K5020.
- 3.ALL HOOD:MOLDING 45P PVC BLACK.

WIRE CONNECTION

P1	CODE	P2
2	RED	1
3	WHITE	2
6,8	GREEN	3
5,	BLACK, DRAIN WIRE	4,5, SHELL

REV.	DESCRIPTION
A	FOR APPROVAL

TOLERANCE		DRAW BY		IMEX INC.	
.X	.015/.30	ZHOUHUI		DB-09F / MINI USB B PLUG	
.XX	.010/.10	CHECK BY		USE ON:	
.XXX	.005/.05	DATE		DRAWING NO: A994-6001	
ANGLE	+	°		REV.	
SCALE	NONE	UNIT		A	
		m/m			